


Warmzone Floor Heating Thermostats

CTW Touch Floor Sensing Programmable Thermostat

An “all-in-one” programmable thermostat for electric underfloor heating control where optimal comfort temperature and minimum energy consumption is required. Includes floor sensor with 10-foot (3-meter) cable.

- Simple user interface and thoughtful installation design
- Pre-programmed for quick setup
- Monitored energy consumption
- Easy to use / Simple operation
- Multi voltage: 120-240 VAC (includes 208 VAC)
- Output relay: 15A
- Large back-lit display for easy reading
- Class A GFCI for wet room installation

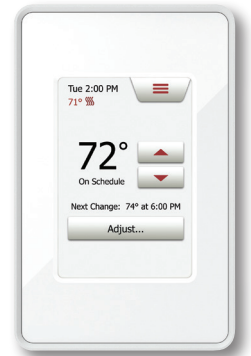

CTW Dual Sensing Programmable Thermostat

The programmable thermostat with dual sensors is an “all-in-one” programmable thermostat for electric underfloor heating control where optimal comfort temperature and minimum energy consumption is required.

- Simple user interface and thoughtful installation design
- Includes two sensors: a built-in air sensor (to measure room temperature) and a floor sensor with 10-foot (3-meter) cable to measure actual floor temperature.
- Pre-programmed for quick setup
- Monitored energy consumption
- Simple operation (Easy to use)
- Multi voltage: 120-240 VAC (includes 208 VAC)
- Output relay: 15A
- Large back-lit display for easy reading
- Serves as single thermostat for all applications (room, floor, room with floor limitation and as regulator)
- Class A GFCI for wet room installation



CTW Power Module Slave Relay

For large floor heating applications, the Power Module Slave Relay can be extended with additional Power Relay Modules. The PRO Slave Relay module features a built-in Class A GFCI and increases output by 15 amps per module. Output can thus be increased by 15A per module.

- Easy to use
- Screw terminals for safe and easy installation
- For use only with the CT Programmable Thermostat
- Multi voltage: 120-240 VAC (includes 208 VAC)
- Output relay: 15A
- Class A GFCI: suitable for wet room installation



CTW Digital/Non-programmable Thermostat with Floor Sensor Optimal comfort in controlling electrical underfloor heating. Built on efficiency, intuitive operation and with a stylish design. Includes floor sensor with 10-foot (3-meter) cable.

- Simple user interface and thoughtful installation design / Easy to use
- Screw terminals for safe and easy installation
- Multi voltage: 120-240 VAC (includes 208 VAC)
- Output relay: 15A
- Large back-lit display for easy reading
- Class A GFCI: suitable for wet room installation

