



SFP-24 Eave Roof Panel

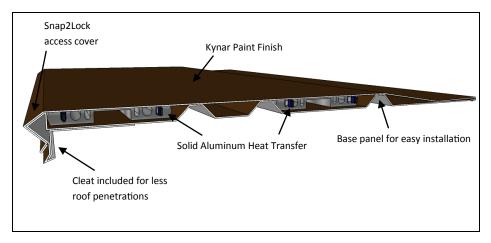

- Effectively controls ice and snow with four passes of cable
- * Heats more than 24 inches up the roof deck
- * Comes with a 30-year protective Kynar finish
- Sheet metal pieces come in 48-inch widths for ease of handling
- * An economical and beautiful option to control ice dams for 24-inch eave overhangs

System Parts List:

- 2-6" Aluminum Extrusion
- 1—SFP 24 ga. Kynar Steel Base
- 1—SFP Cleat Drip Edge
- 1—SFP 24 ga. Kynar Steel Cap
- 1—SFP 24 ga. Kynar Steel Expansion Joint



Description

The 24-inch eave roof panel is an efficient method to control any ice dams that would form on a building with an overhang up to 30 inches. With close to 30 inches of the deck covered, the SFP-24 panel will create all the open area for water to safely flow from the roof without the possibility to refreeze over unheated portions of the roof. The roof heated panel system gives an aesthetic look to any structure while keeping a more efficient and cleaner method to eliminate ice dam issues. All SFP systems come standard with a durable 30-year Kynar finish to match most desired looks.

Applications

For all buildings with a pitch greater than 4/12

For new roof installations:

Asphalt Shingle Wood Shake Shingles Tile or Slate Roofs

Wood Shake Shingles

Standing Seam Metal

For installation on existing roofs: Asphalt Shingle

Key Sections

- 1. Chosen Roofing Material
- 2. 12" Strip of Ice & Water Barrier
- 3. SFP-24 Cover
- 4. 2 6"Extrusions with 4 Passes of heat cable
- 5. SFP-24 Base
- 6. SFP-Cleat
- 7. Structural Roof Sheeting
- 8. 2806-R / 6 Watts per Foot Heat Cable
- 9. Full Roof Water Barrier

