
PREMIER RADIANT HEATING

SFP-36 Eave Roof Panel

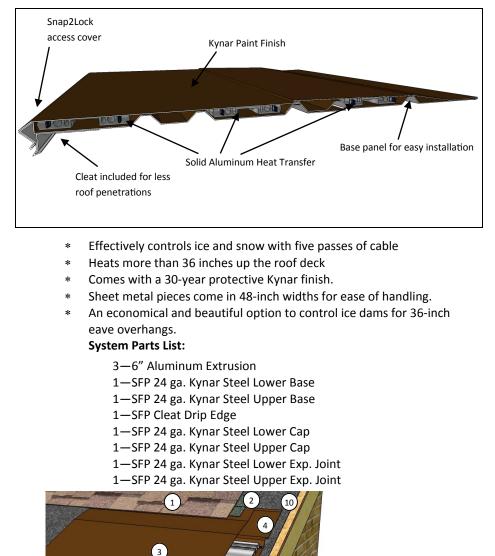

6

Description

The 36-inch eave roof panel is an efficient method to control any ice dams that would form on a building with an overhang up to 40 inches. With close to 42 inches of the deck covered, the SFP-36 panel will create all the open area for water to safely flow from the roof without the possibility to refreeze over unheated portions of the roof. The heated panel system gives an aesthetic look to any structure while keeping a more efficient and cleaner method to eliminate ice dam issues. All SFP systems come standard with a durable 30-year Kynar finish to match most desired looks.


Applications

For all buildings with a pitch greater than 4/12

For new roof installations: Asphalt Shingle Wood Shake Shingles Tile or Slate Roofs Standing Seam Metal For installation on existing roofs: Asphalt Shingle Wood Shake Shingles

Key Sections

- 6. Lower SFP-36 Cap
 - 7. Lower SFP-36 Base
 - 8. Structural Roof Sheeting
 - 9. SFP-Cleat
 - 10. Full Roof Water Barrier



Chosen Roofing Material

Upper SFP-36 Cap

Upper SFP-36 Base

of cable

12" Strip of Ice & Water Barrier

3—6"Extrusions with 5 Passes

513

1.

2.

3.

4. 5.