

# Roof Deicing

SELF-REGULATING HEAT CABLE



# Self-Regulating Heat Cable Comparison


Warmzone self-regulating heat cable features a more flexible outer jacket and more durable carbon core than other leading brands of self-reg cable. These features provide more consistent performance, longer lifespan, and easier installation in cold temperatures.

## Key Features of Warmzone Self-regulating Heat Cable vs. Other Cable Brands

### Outer Jacket Quality

#### Typical self-regulating heat cable

The outer jacket of typical self-reg cable tends to “bubble” or separate from the cable core when the cable is manipulated for turns. These irregularities create stress points on the cable that can result in water reaching the core, leading to erratic heating and eventual cable failure.

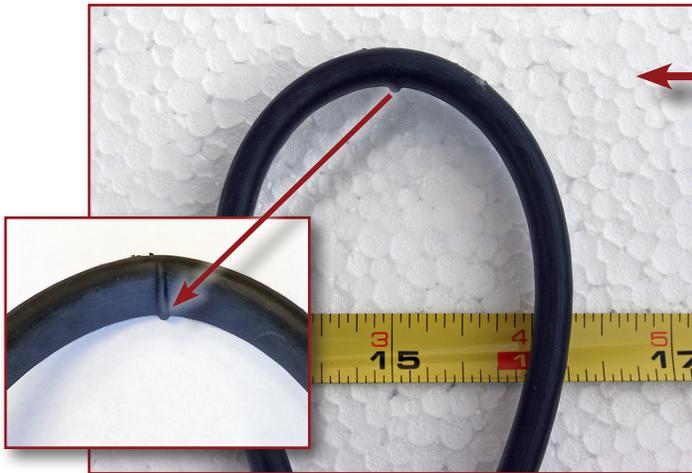

#### Other Leading Brands of Self-regulating Cable

The outer jacket of most self-regulating heat cable separates from the core at a typical bend radius of 2 inches.

#### Warmzone Self-regulating Heat Cable

Warmzone self-regulating heat cable features a higher quality outer jacket that does not “bubble”. This reduces the chances of water seepage and cable failure.



#### Warmzone Self-regulating Heat Cable

Warmzone self-regulating heat cable does not “bubble” at an even tighter bend radius of 1½ inches.

### Installation at Low Temperatures

#### Typical Self-regulating Heat Cable

Typical self-regulating cable has a minimum installation temperature of 32-40°F. This is because the carbon in the cable becomes brittle and can easily break when bent or manipulated at low temperatures.

The outer jacket also becomes stiff, making the securing of cable to the roof, gutter, or pipes difficult during cold weather installations. The outer jacket tends to “pucker” and pull away from the core when making bends, compromising the cable’s integrity and leading to cable failure. Therefore installing most self-regulating heat cable at temperatures below 40°F is not recommended.



*Warmzone self-regulating heat cable and plug with GFCI.*

#### Warmzone Self-regulating Heat Cable


Warmzone self-regulating cable features a higher quality carbon center that is more resilient in low temperatures, thereby allowing the cable to be safely installed at temperatures as low as 0°F.

The higher quality outer jacket also remains flexible at low temperatures, resulting in more reliable performance and easier installation when securing to roofs, gutters, and pipes.


*“In all the years I’ve been installing roof heating systems, I’ve noticed that “bubbles” in the outer jacket of the cable almost always result in a point of failure. The superior outer jacket of Warmzone’s self-reg cable helps to eliminate this problem.”*

*– Eric W., Roofing Contractor*

# Self-Regulating Heat Cable System Overview

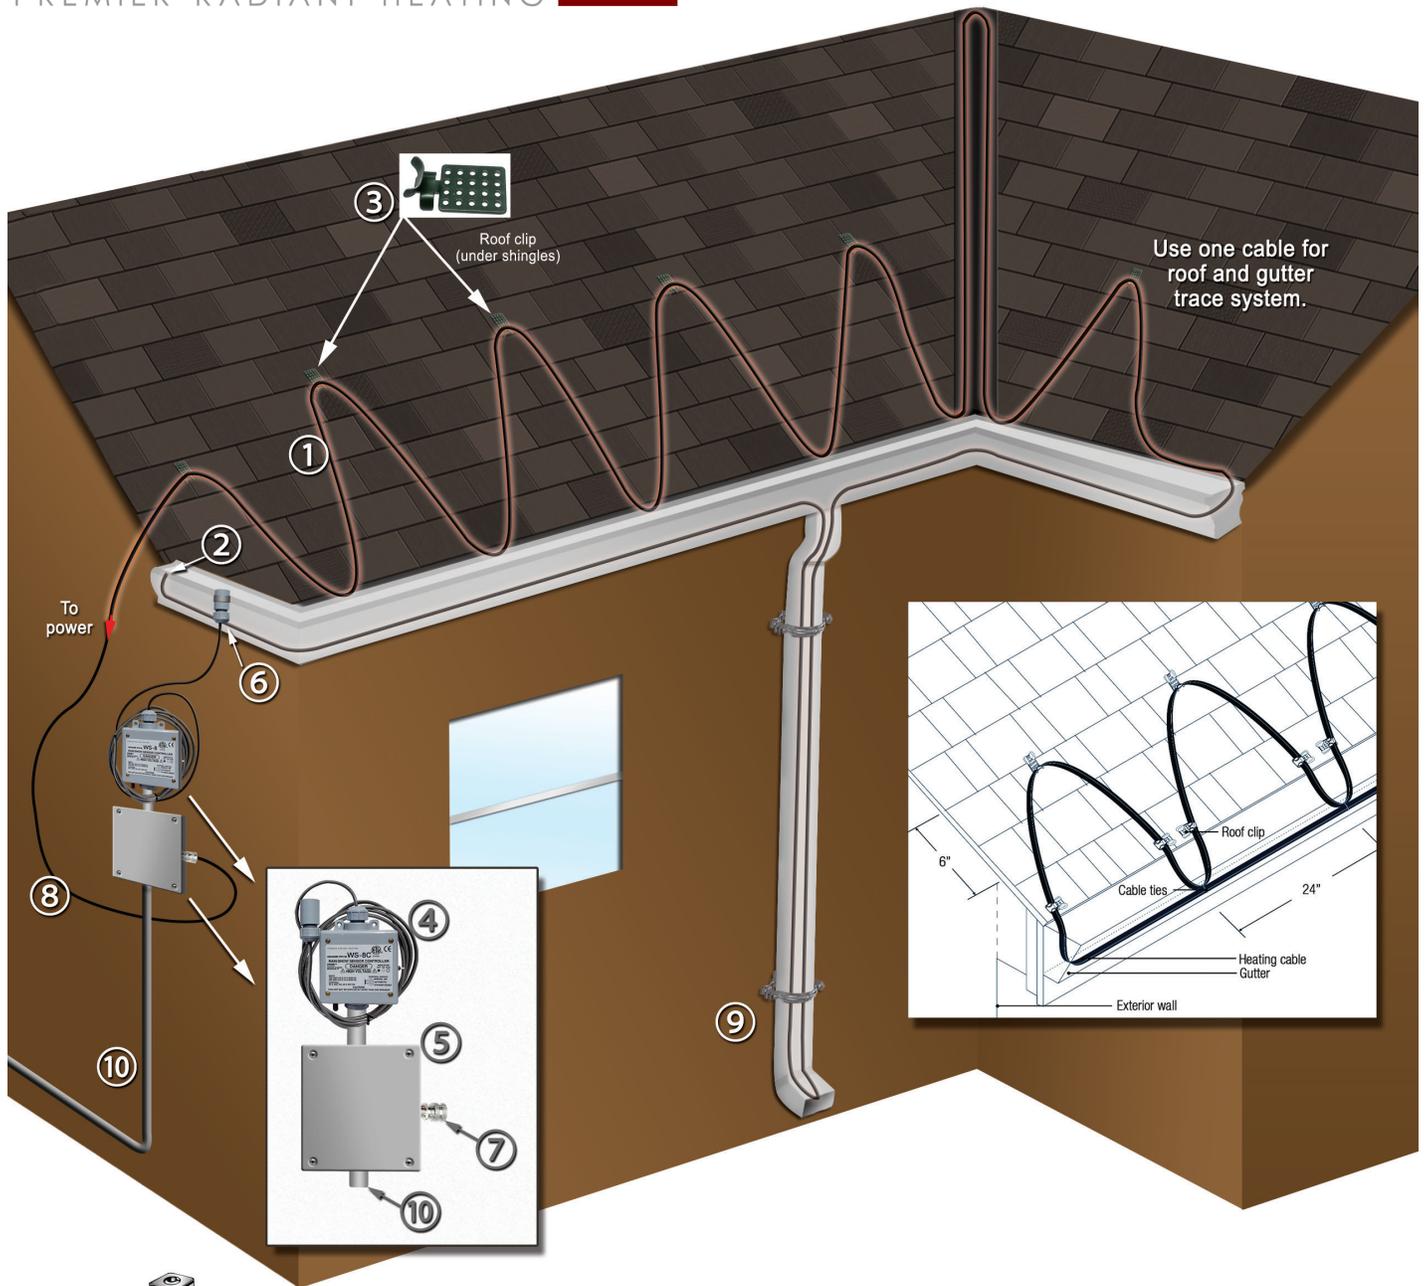

Roof Deicing



Minerallac clamp used to secure remote sensor to gutter (#6).

- ① Self-regulating heat cable
- ② End seal (termination) kit
- ③ Roof cable clips, manufactured for superior performance (under shingles)
- ④ Snow sensor or thermostat (WS-8 sensor with inline sensor shown)
- ⑤ Mulberry or Bell weatherproof junction box
- ⑥ Remote sensor (secured with Minerallac clamp)
- ⑦ Power connection kit
- ⑧ Drip loop (prevents water from trailing into the junction box)
- ⑨ Double or single downspout hanger
- ⑩ Conduit to home

# RoofHEAT

SELF-REGULATING HEAT CABLE



## Self-regulating Roof Heat and Gutter Trace Cable

Most roof deicing applications are best served by using Warmzone's self-regulating heat cable. The heat cable can be installed in gutters and downspouts to keep structures safe from ice damage and frost erosion.

The self-regulating heat cable features an irradiated conductive core that increases its heat output as the ambient temperature falls, and decreases its output when the temperature rises.

### Features and Benefits

- Will not overheat or burnout when overlapped
- Superior quality outer jacket and carbon core
- Features advanced technology that results in highly effective, energy efficient operation
- Can be cut to length in the field
- Fully automated
- Maintenance free
- Protects roofs by preventing ice dams and ice buildup

Several roof heating options are available. Warmzone roof and gutter deicing systems are compatible with the following standard materials:

#### Roof Materials:

- Shake / Shingle
- Rubber / Tar
- Wood / Metal

#### Gutter/Downspout:

- Metal
- Plastic
- Wood



*Self-regulating heat trace cable installed in the gutters of a large commercial facility.*



*Heated roof valley and edges.*




*Warmzone pre-terminated self-regulating heat cable with and without a ground fault circuit interrupter (GFCI).*

# PLSRR Heat Trace Cable Data Sheet

PLSRR is self-regulating heat cable that can be used for roof / gutter heating and pipe tracing applications. The cable features a flexible, UV stabilized thermoplastic elastomer overjacket that protects the durable carbon core for wet applications and exposure to the sun. The parallel heating cable is designed for a variety of industrial applications and environments, including explosion-hazardous and nonhazardous areas, and can be used for plastic or metal pipe freeze protection and temperature maintenance of pipes, tanks, and valves. The cable includes a NON-PRORATED 10-year warranty.

Technical Data for PLSRR Heat Cable	
Service voltage	110-120V, 220-277V
Maximum maintain or continuous exposure temperature (power on)	+149°F (65°C)
Maximum intermittent exposure temperature 1000 hours (power on/off)	+185°F (85°C)
Minimum installation temperature	-40°F (-40°C)
Protective braid resistance	<.006Ω/ft.
Bus wire gauge	16AWG
Approvals	cULus, hazardous, CSA, ATEX, IECEx
Warranty	10 years (Not prorated)
Certifications	Class I, Div.2 Groups A, B, C, D Class II, Div.2 Groups E, F, G Class III

## Power Output Curves Watts per Foot vs. Temperature

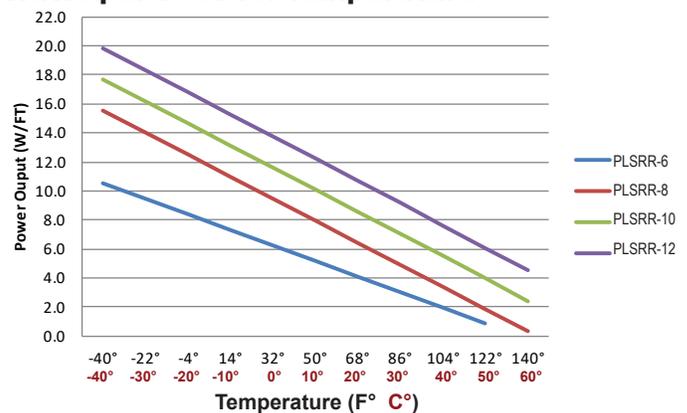

## PLSRR Cable Dimensions

Type	Dimensions	Minimum Bend Radius
PLSR-CR	12.6 x 6.0mm	1.4 inches (36mm)

## Maximum Length (feet) vs Circuit Breaker Size

Cable	Startup Temp.	120 V				240 V			
		15A	20A	30A	40A	15A	20A	30A	40A
PLSRR-6-1 and PLSRR-6-2	50°F (+10°C)	230	270	270	270	460	540	540	540
	32°F (0°C)	230	270	270	270	460	540	540	540
	14°F (-10°C)	180	210	270	270	360	420	540	540
	0°F (-18°C)	140	190	270	270	285	380	540	540
	-20°F (-29°C)	125	165	250	270	250	330	500	540
PLSRR-8-1 and PLSRR-8-2	50°F (+10°C)	150	200	210	210	300	400	420	420
	32°F (0°C)	150	200	210	210	300	400	420	420
	14°F (-10°C)	140	150	205	210	280	300	410	420
	0°F (-18°C)	100	130	200	210	200	265	400	420
	-20°F (-29°C)	85	115	175	210	175	235	350	420
PLSRR-10-1 and PLSRR-10-2	50°F (+10°C)	120	160	180	180	240	315	360	360
	32°F (0°C)	105	140	170	180	210	280	340	360
	14°F (-10°C)	95	125	165	180	190	250	330	360
	0°F (-18°C)	80	110	160	180	160	215	325	360
	-20°F (-29°C)	70	95	140	180	145	190	285	360
PLSRR-12-1 and PLSRR-12-2	50°F (+10°C)	80	140	150	150	160	270	310	310
	32°F (0°C)	75	130	145	150	150	260	290	310
	14°F (-10°C)	70	115	142	150	140	230	285	310
	0°F (-18°C)	60	80	140	150	120	160	280	310
	-20°F (-29°C)	50	65	110	150	105	140	225	310
	-40°F (-40°C)	45	60	90	140	90	125	190	280



## ORDERING INFORMATION

PLSRR-□ - □ - □ (PLSRR-8-2-CR)

**Outer jacket**  
CR=Thermoplastic

**Supply Voltage**  
1=110-120VAC;  
2=208-277VAC

**Output Power (at 40°F)**

**Example:** PLSRR-8-2-CR = 8 watt, 208-277V, Thermoplastic outer jacket

## Approvals:




# PLSRL Heat Trace Cable Data Sheet

Warmzone's PLSRL self-regulating heat cable is the cable of choice for roof heating and gutter trace applications. The UL listed cable features a flexible outer jacket and durable carbon core, providing consistent performance, long lifespan, and easy installation in cold temperatures.

Technical Data for PLSRL Heat Cable	
Service voltage	110-120V, 220-277V
Maximum maintain or continuous exposure temperature (power on)	+149°F (65°C)
Maximum intermittent exposure temperature 1000 hours (power on/off)	+185°F (85°C)
Minimum installation temperature	-40°F (-40°C)
Protective braid resistance	<.006Ω/ft.
Bus wire gauge	16AWG
Approvals	cULus; CE, ATEX, IECEx, EAC
Warranty	2 years (Not prorated)

## Power Output Curves Watts per Foot vs. Temperature

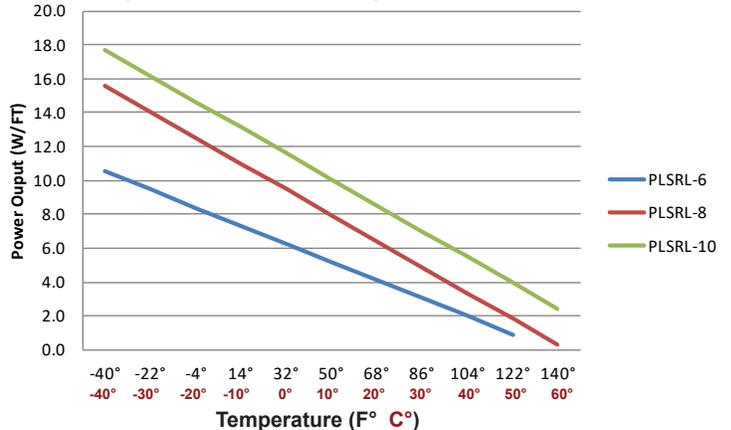

## Maximum Length (feet) vs Circuit Breaker Size


Cable	Startup Temp.	120 V				240 V			
		15A	20A	30A	40A	15A	20A	30A	40A
PLSRL-6-1 and PLSRL-6-2	50°F (+10°C)	230	270	270	270	460	540	540	540
	32°F (0°C)	230	270	270	270	460	540	540	540
	14°F (-10°C)	180	210	270	270	360	420	540	540
	0°F (-18°C)	140	190	270	270	285	380	540	540
	-20°F (-29°C)	125	165	250	270	250	330	500	540
	-40°F (-40°C)	110	145	220	270	220	295	440	540
PLSRL-8-1 and PLSRL-8-2	50°F (+10°C)	150	200	210	210	300	400	420	420
	32°F (0°C)	150	200	210	210	300	400	420	420
	14°F (-10°C)	140	150	205	210	280	300	410	420
	0°F (-18°C)	100	130	200	210	200	265	400	420
	-20°F (-29°C)	85	115	175	210	175	235	350	420
	-40°F (-40°C)	80	105	155	210	155	210	315	420
PLSRL-10-1 and PLSRL-10-2	50°F (+10°C)	120	160	180	180	240	315	360	360
	32°F (0°C)	105	140	170	180	210	280	340	360
	14°F (-10°C)	95	125	165	180	190	250	330	360
	0°F (-18°C)	80	110	160	180	160	215	325	360
	-20°F (-29°C)	70	95	140	180	145	190	285	360
	-40°F (-40°C)	60	85	125	170	125	170	255	340

## ORDERING INFORMATION

PLSRL-□-□-□ For example: PLSRL-6-2-CR

- Outer jacket**  
CR=Thermoplastic
- Supply Voltage**  
1=110-120VAC; 2=208-277VAC
- Output Power** (at 40°F)

**Example:** PLSRL-6-2-CR =  
6 watt, 208-277V,  
Thermoplastic outer jacket

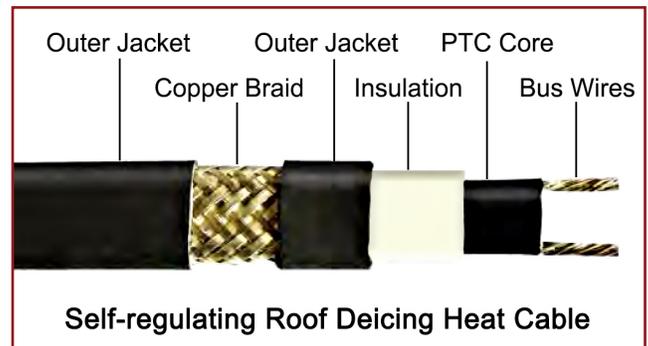

Warmzone self-regulating heat cable.

## PLSRL Cable Dimensions

Type	Dimensions	Minimum Bend Radius
PLSRL-CR	10.9 x 6.0 mm	1.4 inches (36 mm)

Approvals:



# Self-Regulating Roof Heating Cable



**Above:** Example of gutter damage caused by heavy ice buildup. **Right:** House with roof deicing system installed at roof's edge.

Warmzone roof deicing systems can save you money in the long run by eliminating costly roof repairs and water damage. Warmzone's self-regulating heat cable and low-voltage systems are easy to customize and install.

## Self-regulating Heat Cable Accessories

### JSR14 - Roof clips

- A** Roof clips - 50 per bag

### JSR12 - End seal kit

- A** Heat shrinkable tubes (2)
- B** Woven braids (2)
- C** Heat shrink end caps (2)

### JSR15 - Downspout hanger kit

- A** Hanger bracket
- B** Clamp ties

### JSR10 - Splice / tee kit

- A** Clamp tie
- B** Mastic strips (1½" long x 1" wide)
- C** Heat-shrinkable tube (8" long x 1" diameter)
- D** Heat-shrinkable tube (1" long x ⅛" diameter)
- E** Heat-shrinkable tube (1" long x ½" diameter)
- F** Uninsulated braid crimp
- G** Cable ties
- H** Insulated bus wire crimps
- I** Black cloth tape (6" long)
- J** Heat-shrinkable cap
- K** Heat-shrinkable tube for ground

### JSR00 - Power connection kit - with single end seal kit (JSR12)

- A** Black cloth tapes (6" long x 1" width)
- B** Plug-in ground-fault equipment protection device
- C** Black heat-shrinkable tube (8" long x ¾" diameter)
- D** Black heat-shrinkable tube (5" long x ¾" diameter)
- E** Black heat-shrinkable tube (1" long x ⅛" diameter)
- F** Black heat-shrinkable tube (1" long x ½" diameter)
- G** Black heat-shrinkable tube (1½" long x ⅓" diameter)
- H** Uninsulated braid crimp
- I** Uninsulated bus wire crimps
- J** Mastic strips
- K** Clamp ties
- L** Warning labels
- M** Deicing/snowmelt equipment labels



Roof Deicing

# Self-Regulating Heat Cable Specs

## Technical Data

Service voltage	110-120, 208-277 V
Maximum maintain or continuous exposure temperature (power on)	149°F (65°C)
Maximum intermittent exposure temperature 1,000 hours (power on or off)	-40° to 185°F (-40° to 85°C)
Minimum installation temperature	-40°F (-40°C)
Protective braid resistance	< 18.2Ω/km
Bus wire gauge	16 AWG
Approvals	CSA; ordinary and hazardous
Certifications	Class I, Div.2 Groups A,B,C,D Class II, Div.2 Groups E,F,G Class III



For information about Warmzone roof heating cable accessories, refer to the information on page 25.

For additional information, please contact a Warmzone representative at 888.488.9276.

## PLSR Cable Accessories and Controls

Item Number	Description
PLSR00-Roof	Power connection kit
PLSR03-Aluminum	Aluminum application tape
PLSR03-Fiberglass	Fiberglass application tape
PLSR08	Plug-in cord set, 120 V GFCI, 125 ft. maximum run length
PLSR10	Splice / tee kit
PLSR12	End seal kit
PLSR-JHE-L	End seal with light (can be used at beginning or end)
PLSR13	Roof clips - 10/bag
PLSR14	Roof clips - 50/bag
PLSR15	Downspout hanger kit
TF-115	Air sensing NEMA 4 outdoor thermostat 120/240 V
TRF-115	Surface sensing NEMA 4 outdoor thermostat
WS-8C	Aerial mounted snow switch with remote moisture sensor (30 amps; 120-277 V)

## WARMZONE ROOF HEATING CABLE ORDERING INFORMATION

### Pre-Terminated Self-Regulating Cable (Pipe, Roof and Gutter)

Item Code	Description	Length (feet)	Output @ 50°F	Voltage
PLSR-120-50	Pre-terminated self-regulating heat cable	50	6W/ft.	120
PLSRT-120-75	Pre-terminated self-regulating heat cable	75	6W/ft.	120
PLSRT-120-100	Pre-terminated self-regulating heat cable	100	6W/ft.	120
PLSRT-120-50 GF	Pre-terminated self-regulating heat cable with ground fault protection	50	6W/ft.	120
PLSRT-120-75 GF	Pre-terminated self-regulating heat cable with ground fault protection	75	6W/ft.	120
PLSRT-120-100 GF	Pre-terminated self-regulating heat cable with ground fault protection	100	6W/ft.	120

### Self-Regulating Cable (Pipe, Roof and Gutter)

PLSR-120-5	Self-regulating heat cable	250'/500'/1000 ft.	5W/ft.	120
PLSR-120-8	Self-regulating heat cable	250'/500'/1000 ft.	8W/ft.	120
PLSR-120-10	Self-regulating heat cable	250'/500'/1000 ft.	10W/ft.	120
PLSR-120-12	Self-regulating heat cable	250'/500'/1000 ft.	12W/ft.	120
PLSR-240-5	Self-regulating heat cable	250'/500'/1000 ft.	5W/ft.	208-277
PLSR-240-8	Self-regulating heat cable	250'/500'/1000 ft.	8W/ft.	208-277
PLSR-240-10	Self-regulating heat cable	250'/500'/1000 ft.	10W/ft.	208-277
PLSR-240-12	Self-regulating heat cable	250'/500'/1000 ft.	12W/ft.	208-277
*Cut fee	*Cut fee for non 250/500/1000-foot rolls			