

RETROROOF™

Radiant Roof De-icing Systems



RETROROOF PRODUCT SHEET

WARMZONE 
PREMIER RADIANT HEATING


RetroRoof™ De-icing Systems

Designed to Discreetly Prevent the Formation of Ice Dams

Warmzone's RetroRoof™ de-icing system is one of the most advanced ice dam prevention solutions on the market today. The innovative heating panels feature a thin profile and are easy to work with. When installed, they are discreetly concealed underneath the asphalt shingles. The heating panels are available in various standard lengths to accommodate all types of configurations.

The modular design allows the roofing contractor to easily plug the heating panels together to position them in and around problem areas. The panels are easily installed as a "retrofit" de-icing solution under existing shingles, or can be installed in new shingle installation as well. The RetroRoof panels can also be installed in roof valleys to prevent ice dams from forming.

Installation is easy. By removing the release liner on the underside of the panel and then firmly pressing down, the heating panel locks securely in place. Removing the top release liner strip seals the panel to the next course of shingles, making installation of this system quick and simple.

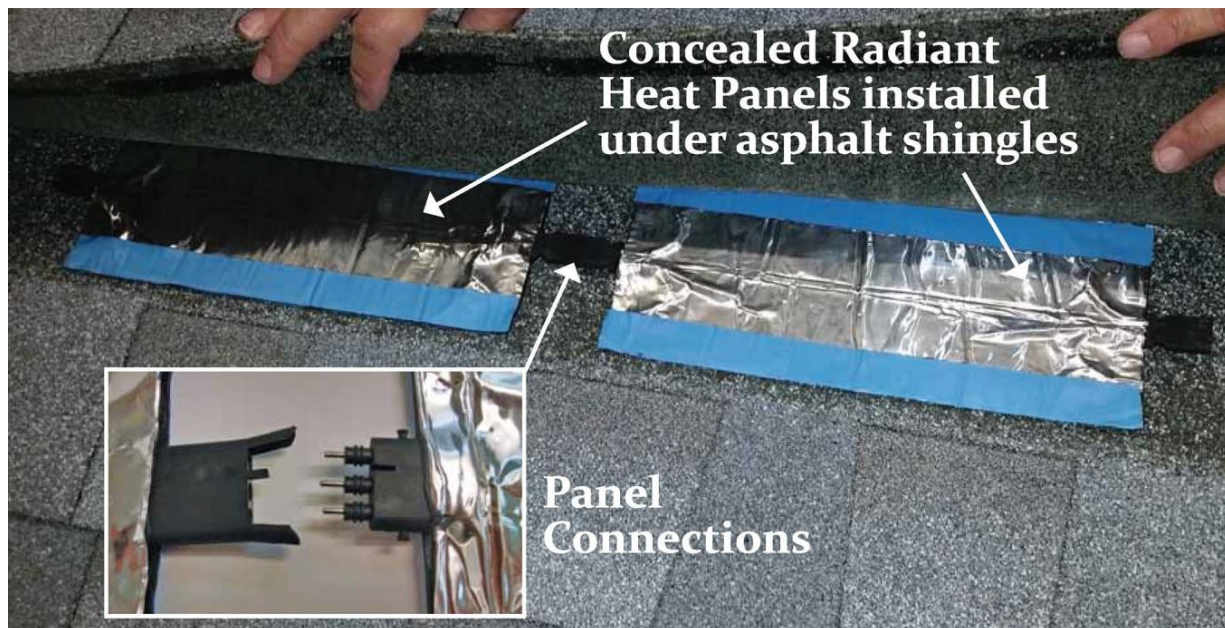

RetroRoof de-icing combined with Warmzone's other heat trace options for gutter and downspout heating can provide you with a comprehensive roof de-icing solution. Warmzone systems include an optional automated controller/snow sensor to safely and efficiently provide you with automated protection against ice dams and dangerous ice build-up.

FEATURES

- Prevents ice dams
- For new and existing roofs
- Completely concealed under shingle
- No nailing required
- ETL Intertek listed
- 15-year limited warranty
- Certified to withstand 110 MPH winds
- Completely waterproof
- Easy to install
- 120V and 240V
- 10 Watts per linear foot
- Maintenance free

SPECIFICATIONS

Thickness:	Less than 0.150-inch
Flammability Rating:	5VA (UL94)
Weight:	7 ounces per foot.
Safety:	In compliance with UL499, ETL Listed

120 Volt Product

WIDTH	LENGTH	WATTS	AMPS
5-inches	3-feet	28.07	0.24
5-inches	4-feet	38.07	0.32
5-inches	5-feet	48.07	0.41
5-inches	10-feet	98.07	0.82
5-inches	20-feet	198.07	1.66
5-inches	25-feet	248.07	2.07
10-inches	3-feet	69.0	0.58
10-inches	5-feet	113.27	0.95
10-inches	10-feet	233.04	1.95

Accessories

Power Cord - Single
Power Cord - Double
Power Cord - Triple
Single Jumper 6-inches
Single Jumper 12-inches
Double Jumper 12-inches
Single Jumper 18-inches
Single Jumper 5-feet
Single Jumper 10-feet
Single Jumper 15-feet

For more information contact a Warmzone roof de-icing expert.

Phone: 888.488.9276

Email: info@warmzone.com

Website: www.warmzone.com



Intertek



Made in the USA

