WARMZONE
PREMIER RADIANT HEATING

DSH

Downspout Hanger



DESCRIPTION
The downspout hanger is used to prevent damage to the deicing cable as it enters a downspout and to support the deicing cable once inside of the downspout.


Use one downspout hanger for each deicing cable entering or exiting the top of the downspout.

Instructions are included on backside of this page.


CONTENTS

- One Downspout Hanger
- Two Plastic Clip Ties


INSTALLING THE DSH

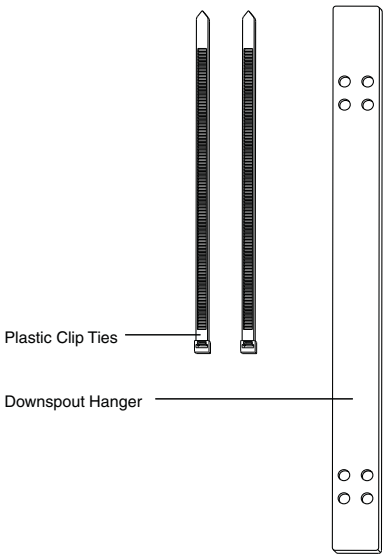


Detail 1. Downspout hanger and Plastic Clip Ties.

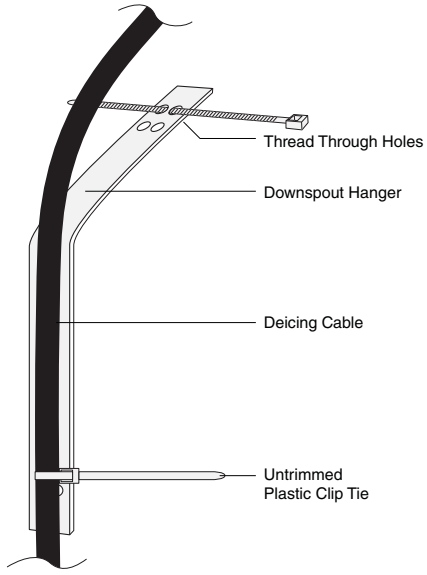


Detail 2. Bend the downspout hanger 90°. Insert clip ties through the holes.

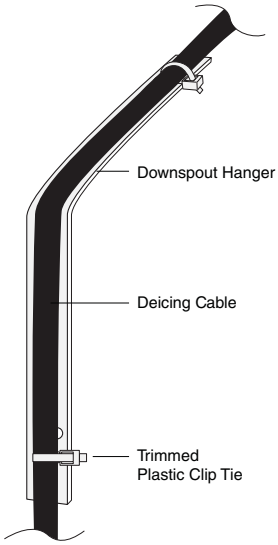

Detail 3. Position the downspout hanger and deicing cable and tighten the clip ties. Trim off excess clip tie.

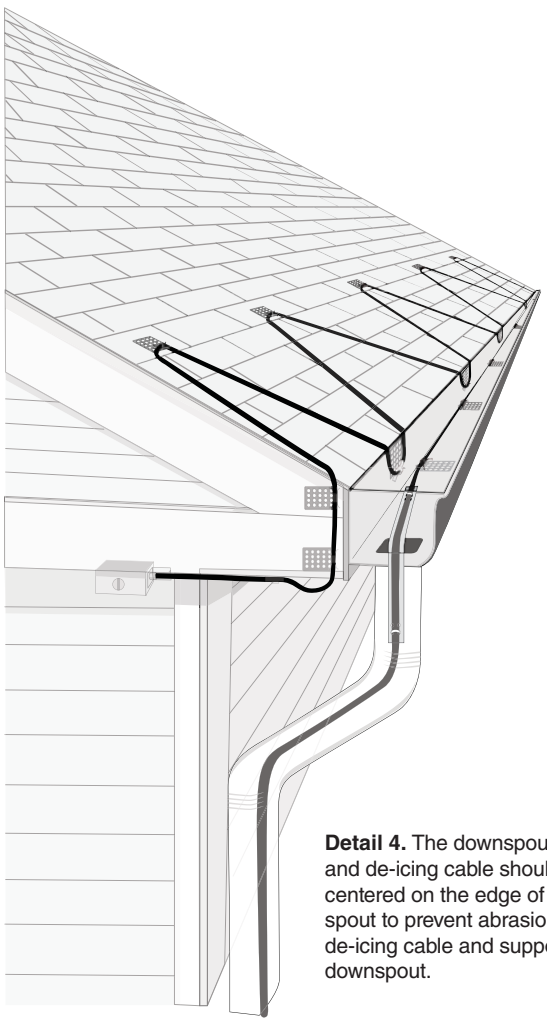

Detail 4. The downspout hanger and de-icing cable should be centered on the edge of the downspout to prevent abrasion of the de-icing cable and support it in the downspout.

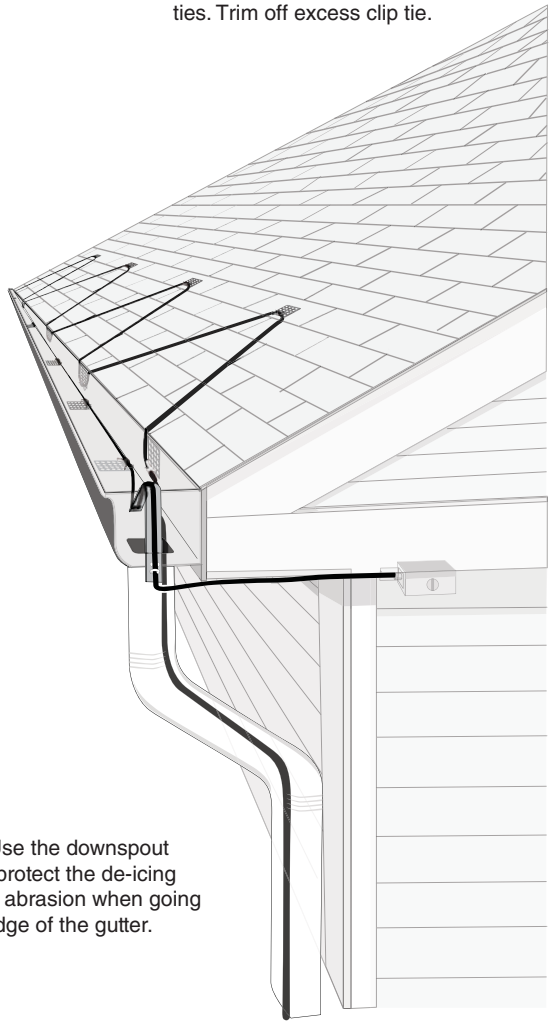

Detail 5. Use the downspout hanger to protect the de-icing cable from abrasion when going over the edge of the gutter.

TECHNICAL SUPPORT

A full set of installation instructions is included with order.
Please call 1-888-488-9276 with any questions.

WARMZONE 12637 S. 265 W., Suite 100 Draper UT, 84020 Office: (801) 948-7500 Fax: (801) 948-7599 (888) 488-9276